












SPECIFIKACIJA ARMATURE SIFONSKOG OKNA

 EU funded project Projekat finansira Europska Unija		 part of the WYG group  creative minds safe hands	
Client/Klient INFRASTRUCTURE PROJECTS FACILITY IN THE WESTERN BALKANS		Consultant/Konsultant WYG INTERNATIONAL UK	 INSTITUT ZA HIDROTEHNIKU GRADEVINSKOG FAKULTETA U SARAJEVU
Project/Projekat REGIONALNI SISTEM VODOSNABDIJEVANJA PLAVA VODA			
Project status/Tip Projekta GLAVNI PROJEKT	Drawing date /Datum crteža: 09.06.2011. Drawing approved/Crtež odobren: 24.11.2011.	Drawing status /Status Crteža FINAL	Drawing scale/Mjerilo crteža (Priloga) Format A3(420/297 mm)
Drawing name/Ime Priloga SPECIFIKACIJA ARMATURE SIFONSKOG OKNA	Prepared by:  INSTITUT ZA HIDROTEHNIKU GRADEVINSKOG FAKULTETA U SARAJEVU Sjedište: Tomića 1, Sarajevo, Bosna i Hercegovina Tel./Fax: 21 24 6667; 20 44 95; 197 405; E-mail: hts@hts.com.ba © 2004-2011. HTS d.o.o. Svi prava zadržana. HTS d.o.o.		Drawing no/ Prilog broj 2A.16.2
		Sheet/List 1	Of/Od 4


Šipke - specifikacija					
ozn.	oblik i mjere [cm]	Ø	lg [m]	n [kom]	lg _n [m]
Temeljna ploca (1 kom)					
1		8	3.72	8	29.76
2		8	2.51	12	30.12
3		8	2.32	116	269.12
4		8	2.49	60	149.40
5		8	2.44	13	31.72
6		8	1.47	13	19.11
Gornja ploca (1 kom)					
1		8	0.67	80	53.60
2		8	0.98	7	6.86
3		8	2.31	8	18.48
4		8	3.52	8	28.16
5		8	2.31	4	9.24
6		8	1.21	2	2.42
7		8	1.63	2	3.26
8		8	1.58	2	3.16
9		8	1.34	2	2.68
Zidovi (1 kom)					
1		8	1.77	152	269.04
2		8	1.71	38	64.98

Šipke - specifikacija					
ozn.	oblik i mjere [cm]	Ø	lg [m]	n [kom]	lg _n [m]
3		8	2.77	40	110.80
4		8	1.72	168	288.96
5		8	1.67	252	420.84
6		8	3.00	80	240.00

Šipke - rekapitulacija			
Ø [mm]	lgn [m]	Jedinična težina [kg/m ¹]	Težina [kg]
RA1			
8	2051.71	0.41	839.15
Ukupno			839.15

Mreže - specifikacija						
Pozicija	Oznaka mreže	B [cm]	L [cm]	n	Jedinična težina [kg/m2]	Ukupna težina [kg]
Temeljna ploca (1 kom)						
I-1	Q-378	215	361	4	5.94	184.33
I-2	Q-378	142	361	2	5.94	60.99
Ukupno						245.32
Gornja ploca (1 kom)						
I-1	Q-188	215	133	1	2.96	8.46
I-2	Q-188	215	127	1	2.96	8.08
I-3	Q-188	182	231	1	2.96	12.45
Ukupno						29.00
Zidovi (1 kom)						
I-1	Q-378	215	277	4	5.94	141.42
I-2	Q-378	202	277	4	5.94	133.05
I-3	Q-378	215	100	10	5.94	127.71
I-4	Q-378	192	100	4	5.94	45.68
I-5	Q-378	215	277	6	5.94	212.01
I-6	Q-378	81	277	6	5.94	80.12
I-7	Q-378	71	100	6	5.94	25.39
II-1	Q-257	215	300	10	4.02	259.29
II-2	Q-257	192	300	4	4.02	92.75
II-3	Q-257	215	100	10	4.02	86.43
II-4	Q-257	182	100	4	4.02	29.31
II-5	Q-257	71	300	6	4.02	51.56
II-6	Q-257	61	100	6	4.02	14.77
III-1	Q-188	215	300	4	2.96	76.37
III-2	Q-188	182	300	4	2.96	64.74
III-3	Q-188	215	300	6	2.96	114.55
III-4	Q-188	61	300	6	2.96	32.63
Ukupno						1587.79

Mreže - plan sječenja

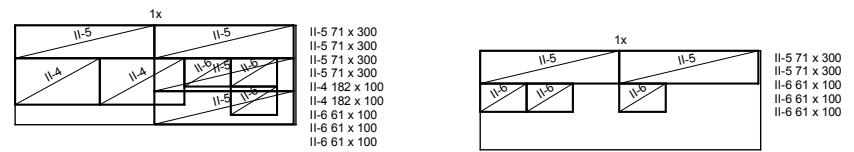

Q-188

