






SPECIFIKACIJA ARMATURE OKNA PUMPI HLORNE STANICE

		EU funded project Projekat finansira Europska Unija			
Client/Klient		Consultant/Konsultant			
INFRASTRUCTURE PROJECTS FACILITY IN THE WESTERN BALKANS		WYG INTERNATIONAL UK		 INSTITUT ZA HIDROTEHNIKU GRADJEVINSKOG FAKULTETA U SARAJEVU	
Project/Projekat					
REGIONALNI SISTEM VODOSNABDIJEVANJA PLAVA VODA					
Project status/Tip Projekta	Drawing date /Datum crteža: 09.05.2011.	Drawing status /Status Crteža FINAL	Drawing scale/Mjerilo crteža (Priloga)		
GLAVNI PROJEKT	Drawing approved/Crtež odobren: 09.06.2011.		Format A3(420/297 mm)		
Drawing name/Ime Priloga	Prepared by:	Drawing no/ Prilog broj			
SPECIFIKACIJA ARMATURE OKNA PUMPI HLORNE STANICE	 INSTITUT ZA HIDROTEHNIKU GRADJEVINSKOG FAKULTETA U SARAJEVU Sarajeva, Tomica 1, Sarajvo, Bosnia i Hercegovina Bul.Firka: 21 24 6607, 20 24 595 195, 4205 E-79081 info@ihf.ba OIB broj: 620606910003, PIB broj: 200606910003, REG. broj u sudu: 1419410003	3.20.3		Sheet/List	Of/Od
				1	3

Specifikacija armature – BETONSKO OKNO HLORNE STANICE


Šipke - specifikacija					
ozn.	oblik i mere [cm]	Ø	lg [m]	n [kom]	lg _n [m]
Gornja ploca (1 kom)					
1		8	0.51	18	9.18
3		8	1.11	70	77.70
4		8	1.16	90	104.40
6		10	2.36	8	18.88
7		10	1.86	12	22.32
8		10	1.60	4	6.40
Zidovi (1 kom)					
1		10	1.86	32	59.52
3		8	1.16	160	185.60
Temeljna ploca (1 kom)					
1		8	1.16	90	104.40
2		8	1.21	90	108.90
3		10	2.36	8	18.88
4		10	1.86	8	14.88

Šipke - rekapitulacija				
Ø [mm]	lgn [m]	Jedinična težina [kg/m']	Težina [kg]	
RA1				
8		590.18	0.41	241.38
10		140.88	0.65	91.43
Ukupno				332.81


Specifikacija armature – BETONSKO OKNO HLOORNE STANICE

Mreže - specifikacija						
Pozicija	Oznaka mreže	B [cm]	L [cm]	n	Jedinična težina [kg/m2]	Ukupna težina [kg]
Gornja ploca (1 kom)						
I-1	Q-188	215	186	2	2.96	23.67
I-3	Q-188	66	86	2	2.96	3.36
Ukupno						27.03
Zidovi (1 kom)						
I	Q-188	0	0	17	2.96	0.00
I-1	Q-188	215	186	4	2.96	47.35
I-2	Q-188	66	186	4	2.96	14.53
II-3	Q-188	186	186	4	2.96	40.96
Ukupno						102.84
Temeljna ploca (1 kom)						
I	Q-188	0	0	8	2.96	0.00
I-1	Q-188	215	186	2	2.96	23.67
I-2	Q-188	66	186	2	2.96	7.27
Ukupno						30.94
Mreže - rekaptulacija						
Oznaka mreže	B [cm]	L [cm]	n	Jedinična težina [kg/m2]	Ukupna težina [kg]	
Q-188	215	605	6	2.96	231.01	
Q-188	0	0	25	2.96	0.00	
Ukupno						231.01


Mreže - plan sečenja	
Gornja ploca	
Q-188	

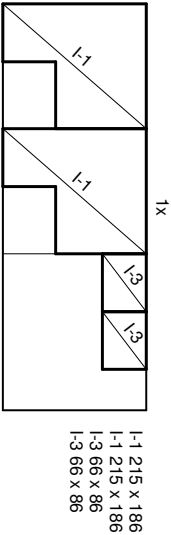

Zidovi	
Q-188	

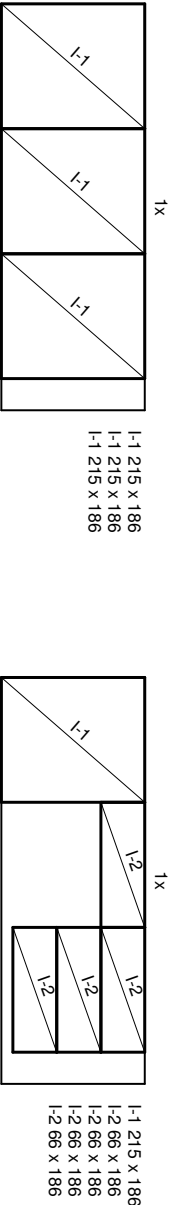

Q-188	
-------	--

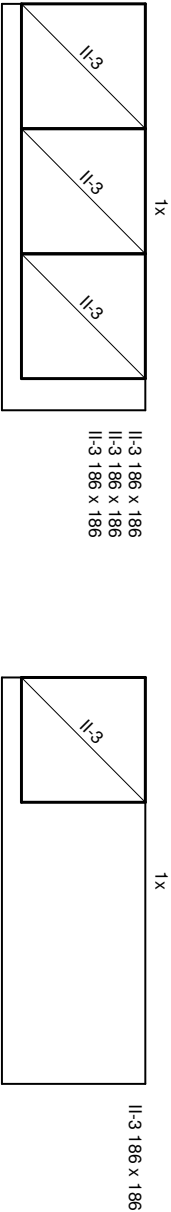

Temeljna ploca	
Q-188	

